

# **BIOTURF - DEVELOPMENT OF A SUSTAINABLE BIO-BASED ARTIFICIAL TURF SYSTEM WITH IMPROVED RECYCLING ABILITIES**

D. HANUSCHIK<sup>1</sup>, C. POST<sup>1</sup>, U. BERGHAUS<sup>2</sup>, F. PURSCHE<sup>3</sup>, R. KRAUSE<sup>3</sup>, T. RÜDIGER<sup>1</sup>, S. GELDERBLOM<sup>1</sup>, B. ASLAN<sup>1</sup>

1 TFI - INSTITUT FÜR BODENSYSTEME AN DER RWTH AACHEN E.V., AACHEN, GERMANY

2 MORTON EXTRUSIONSTECHNIK GMBH, ABTSTEINACH, GERMANY

3 ITA - INSTITUT FÜR TEXTILTECHNIK, RWTH AACHEN UNIVERSITY, GERMANY







### **State of the art**

- After tufting the textile, the back of the primary backing is coated with latex or polyurethan to fix the pile yarn
- Polyurethan and latex ensure stability but avoid high-quality material recycling regarding a closedloop economy

## **New Approach**

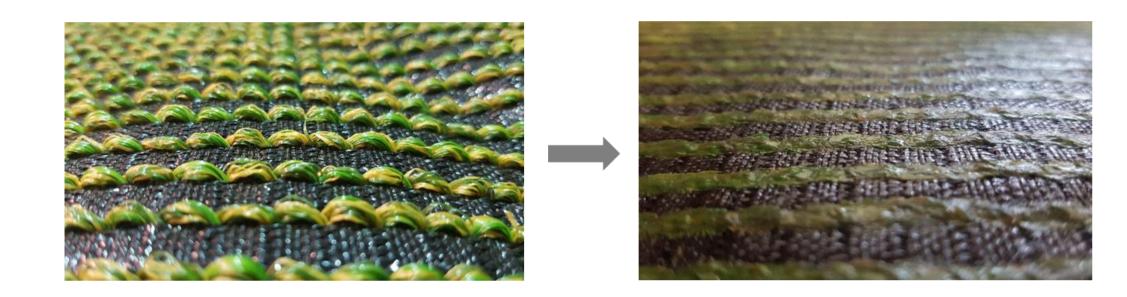


- New process of fusion-bonding allows pile binding without additional material
- Substitution of plastic infill by texturized yarns ullet
- Mono-material construction without infill will ulletovercome this obstacle enabling true reuse of the material employed.

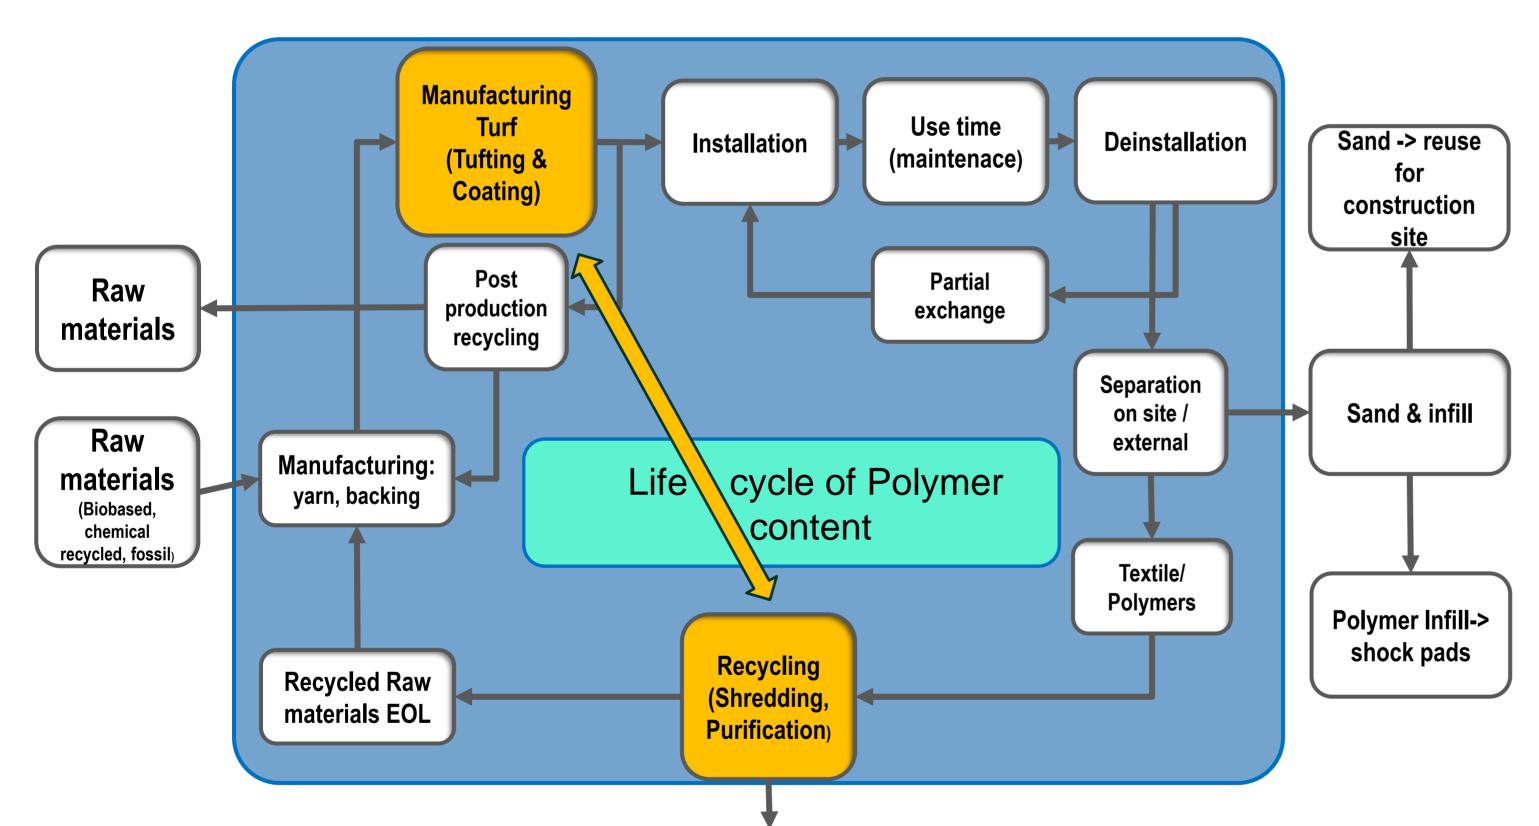

## Implementation

better recycling abilities imply adapted stategies in design and manufacturing 8-10 years before recycling time:

- 1. Construction of recyclable mono-material turf
- 2. Substitution of microplastic generating infill with textured yarn
- 3. Pile yarn fixation process without latex or polyurethan via fusionbonding
- 4. Adaption of tufting process to guarantee dimensional stability



#### **Results**

In addition to raw material savings, the following benefits are achieved:

Reduction of energy via fusionbonding: 400,5 kWh/a\* Reduction of CO<sub>2</sub> emission via fusionbonding: **38.685 t/a**\* \* based on estimated production of artificial turf in 2023: 30 Mio. m<sup>2</sup>

SPONSORED BY THE



Federal Ministry of Education and Research

CREATE THE CHANGE - TRANSFORM THE TEXTILE VALUE CHAIN FROM PETROLEUM-BASED TO BIO-BASED



